


# Nose Extensions



Some jobs require access to tight or hard-to-reach spaces. RAD Torque Systems offers a wide range of solutions for these common but difficult applications, including OTR wheel bolting applications. We offer nose extensions with a fixed reaction paddle, as well as ones without any reaction arm to facilitate additional flexibility.

**Need something specific? Talk to us about designing a custom nose extension tailored to meet your requirements.**

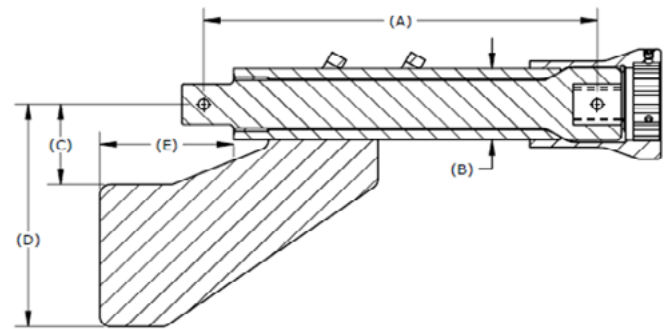

Part Number	Suitable for Model	Dim A in	Dim B in	Dim C in	Dim D in	Dim E in	Torque Limit ft. lb.	Reaction Arm
14195	RAD 10GX	12.0	1.68	N/A	N/A	N/A	1000	11842
14200	RAD 10GX	15.0	1.68	N/A	N/A	N/A	1000	11842
14205	RAD 10GX	18.0	1.68	N/A	N/A	N/A	1000	11942
18185	RAD 15DX	12.0	1.75	N/A	N/A	N/A	1500	20153
19058	RAD 15DX	15.0	1.75	N/A	N/A	N/A	1500	20153
19059	RAD 15DX	18.0	1.75	N/A	N/A	N/A	1500	20153
10259	RAD 1800NG	12.0	2.00	2.10	5.60	3.25	1800	WELDED
10257	RAD 1800NG	15.1	2.00	2.10	5.60	3.50	1800	WELDED
10258	RAD 1800NG	17.1	2.00	2.10	5.60	3.50	1800	WELDED
12096	RAD 25GX	12.0	2.00	2.10	5.60	3.25	2500	WELDED
12061	RAD 25GX	15.1	2.00	2.10	5.60	3.25	2500	WELDED
12097	RAD 25GX	17.1	2.00	2.10	5.60	3.25	2500	WELDED
11750	RAD 34GX	*11.5	2.00	2.10	5.60	3.38	2500	WELDED
11751	RAD 34GX	*14.5	2.00	2.10	5.60	3.38	2500	WELDED
11752	RAD 34GX	*17.5	2.00	2.10	5.60	3.38	2500	WELDED

**\*Note:** Dimension A is effective center to center dimension for spline drive shafts