

RAD WHEEL NUT & OTR MINING

Accidents caused by incorrectly tightened wheel nuts are a serious problem. That's why the RAD Wheel Nut Bolting was designed with one job in mind: wheel nut bolting where torque control is a must.


RAD planetary gear torque wrenches are vibration free and have the accuracy to prevent accidental under- and over-tightening. The nose extensions are ideal for reaching wheel nut studs that are recessed and have tight clearances.

- Removable custom reaction arms designed to fit virtually on any wheel configuration
- Extended reaction point for safe and quick operation
- Accuracy to ensure correct tightened wheels



The nose extension (-R) Developed exclusively for extreme duty maintenance of mining haul trucks from 50-400 ton capacities and front-end loaders. The extended nose allows safe access of virtually all wheel configurations found on today's heavy equipment.

The nose extension kit (-NX) Designed with flexibility in mind. Complete with 3 different reaction arms and a nose extension for hard-to-reach areas, the NX Kit is a "go anywhere" tool capable of a variety of applications but especially suitable for off-road construction equipment.

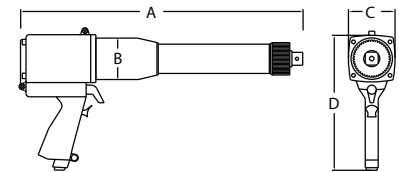

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (ft. lbs.)		RPM	WEIGHT (lbs.)	NOISE LEVEL	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D	DIMENSION E
			LOW	HIGH								
13495	7GX-R	0.75"	300	700	115	12.0	80 db	14.5"	2.5"	2.0"	2.75"	9.0"
13691	10GX-NX	0.75"	200	1000	20	8.0	80 db	8.15"	2.5"	n/a	2.75"	8.07"
20810	15NDX-R	1.0"	300	1500	10	16.0	80 db	21.35"	2.7"	2.7"	2.75"	8.02"
19339	15DX-NX	1.0"	300	1500	10	8.6	80 db	8.0"	2.7"	n/a	2.75"	8.1"
13477	1800NGX-R	1.0"	500	1800	10	27.5	85 db	21.5"	3.0"	2.0"	3.3"	9.5"

Accuracy of +/-4%, Repeatability of +/-2%

RAD TORQUE SYSTEMS